

JC100系列

雙金屬溫度計



C100-1
筆型攜帶型



C100-2
筆型攜帶型



C100-2L
90度埋入型



C100-AL
90度埋入型(溫度面板可
左右調整)



C100-AS
直立式(溫度面板可
左右調整)



C100-BL
(T)型90度埋入式



C100-BS
(I)型直立式



C100-BA
直立式(可前後
左右調整角度)

* 接頭材質為:(SuS 304#316#)

型號	外徑	外殼	接頭	範圍
C100-1	1"	SUS 304#		-40°C ~ 300°C
C100-2	2"			-40°C ~ 250°C
C100-2L	1 1/2", 2"		1/4", 1/4" PT	-10°C ~ 300°C
C100-AL	3", 4", 5"		1/4", 1/2", 1/2" PT	-50°C ~ 600°C
C100-AS	3", 4", 5"		1/4", 1/2", 1/2" PT	-70°C ~ 540°C
C100-BL	2 1/2", 3", 4", 5", 6"		1/4", 1/4", 1/2", 1/2", 1/2" PT	-50°C ~ 600°C
C100-BS	3", 4", 6"		1/4", 1/2", 1/2" PT	-50°C ~ 600°C
C100-BA	3", 4", 5", 6"		1/4", 1/2", 1/2", 1/2" PT	-50°C ~ 600°C

JC350系列

特殊研發設計型溫度計, 烤箱、室內用溫度計



C350-1 烤箱用

C350-2
(室內用)

2"



1"



1 1/2"



1 3/4"

JC200系列


液體填充型隔測式(附警報接點式)溫度計



MF型
(埋入)



MW型
(直立)



JC250系列

氣體壓力式隔測溫度計



50A



60A



(冷凍庫專用)


75A

JC380系列

特殊研發設計型溫度計, 冰箱、冷凍庫用



CU-1



CU-2

JC300系列

工業用溫度計 (玻璃管式)



ΔL



ΔS



OL



OS



AS



AI

外殼: 塑膠(ΔL,S)銅(OL,S)
面徑: 6 1/2", 4 1/2"
接頭: 銅, 1/2, NPT
範圍: -50°C ~ 200°C


外殼: 氧化鋁(AS,AL),(電鍍銅)
面徑: 4 1/2", 6", 8"
接頭: 銅, 1/2, NPT
範圍: -60°C ~ 600°C

JC600系列


電子式溫度計



DW-01T

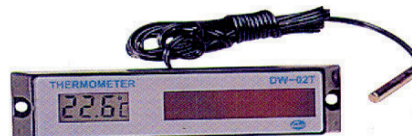

DW-02T



DW-03



SW-01A



SW-01



DW-04