

TK型

KANON 日本製棒型拉力計 (置針付)

| 型 號 | 最小刻劃値 g | 測定範圍 g | 全 長 mm | 水平誤差 g |
|-----------|---------|--------|--------|--------|
| TK-10 | 0.5 | 10 | 210 | 3 |
| TK-30 | 1 | 30 | 215 | 3 |
| TK-50 | 1 | 50 | 215 | 3 |
| TK-110 | 2 | 110 | 239 | 10 |
| TK-300 | 5 | 300 | 239 | 10 |
| TK-500 | 10 | 500 | 240 | 30 |
| TK-1000 | 25 | 1000 | 240 | 30 |
| TK-2000 | 50 | 2000 | 240 | 30 |
| TK-3000 | 50 | 3000 | 275 | 50 |
| TK-5000 | 100 | 5000 | 309 | 100 |
| TK-10000 | 200 | 10000 | 309 | 100 |
| TK-20000 | 200 | 20000 | 496 | 350 |
| TK-30000 | 500 | 30000 | 568 | 350 |
| TK-50000 | 1000 | 50000 | 588 | 350 |
| TK-100000 | 1000 | 100000 | 591 | 350 |




KANON 日本製扭力扳手

QLK型

棘輪型扭力扳手


60~2800QLK



4200~5600QLK



7000~14000QLK

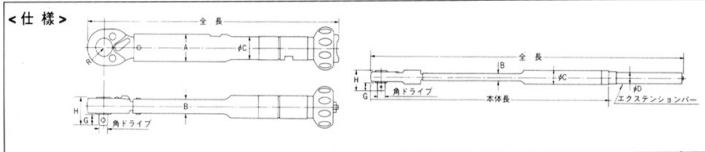

| 型 號 | 調整範圍 | 最小讀值 | 口角頭 | 全長 | 本 體 尺 寸 | | | | | | | | | |
|----------|-------------|----------|-------|------|---------|------|------|------|------|------|-------|-----|--|--|
| | | | | | H | G | R | A | B | C | D | 本體長 | | |
| 30QLK | 10~30kgf.cm | 1kgf.cm | 6.35 | 186 | 18.8 | 7.5 | 12 | 18.2 | 9.6 | 15 | | | | |
| 60QLK | 20~60 | 1 | | | | | | | | | | | | |
| 120QLK | 40~120 | 2 | 9.35 | 232 | | | | | | | | | | |
| 230QLK | 70~230 | 2 | | | | | | | | | | | | |
| 450QLK | 100~450 | 5 | 254 | 25 | 11 | 16 | 25 | 11.4 | 20 | | | | | |
| 900QLK | 200~900 | 10 | | | | | | | | | | | | |
| 1000QLK | 200~1,000 | 10 | 352 | 31 | 14 | 19.5 | 27.5 | 12.4 | 21.7 | | | | | |
| 1400QLK | 400~1,400 | 10 | | | | | | | | | | | | |
| 1800QLK | 400~1,800 | 20 | 478 | 33 | 14 | 23 | 34 | 15.4 | 27.2 | | | | | |
| 2000QLK | 400~2,000 | 20 | | | | | | | | | | | | |
| 2800QLK | 4~28kgf.m | 0.2kgf.m | 680 | 41 | | 23 | 34.8 | 15.8 | 27.2 | | | | | |
| 4200QLK | 6~42 | 0.3 | | | | | | | | | | | | |
| 5600QLK | 8~56 | 0.3 | 1,195 | 49.5 | 20 | 34 | 43.5 | 18 | 34 | | | | | |
| 7000QLK | 10~70 | 0.5 | | | | | | | | | | | | |
| 8500QLK | 10~85 | 0.5 | 1,390 | 58 | 27 | 38 | 54 | 23 | 42.7 | 31.8 | 997 | | | |
| 10000QLK | 10~100 | 0.5 | | | | | | | | | | | | |
| 14000QLK | 20~140 | 1 | 1,850 | 61 | 27 | 44 | 66 | 26 | 51 | 40 | 1,153 | | | |

KANON 日本製扭力扳手

TMK型


針盤式扭力扳手

置針付



TMK型



60~2000



2800~5500



7000~14000

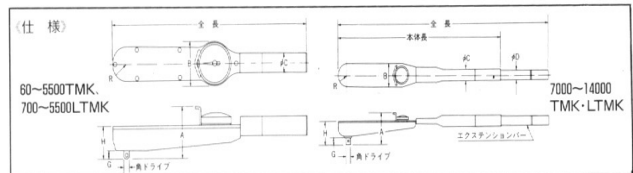

| 型 號 | 調整範圍 | 最小讀值 | 口角頭 | 全長 | 本 體 尺 寸 | | | | | | | | | |
|----------|--------------|---------|-------|-------|---------|-------|------|----|-----|----|----|-----|-----|--|
| | | | | | H | G | R | A | B | C | D | 本體長 | | |
| 置 針 型 | kgf-cm/kgf-m | mm | mm | mm | H | G | R | A | B | C | D | 本體長 | | |
| 60TMK | 5~60kgf.cm | 1kgf.cm | 6.35 | 222 | 42 | 11.5 | 19.5 | 65 | 50 | 21 | | | | |
| 120TMK | 10~120 | 2 | | | | | | | | | | | | |
| 300TMK | 25~300 | 2 | 9.53 | 315 | 43 | 11.5 | 13.5 | 71 | 85 | 20 | | | | |
| 700TMK | 50~700 | 5 | | | | | | | | | | | 12 | |
| 1400TMK | 1~14 | 0.2 | 12.7 | 469 | 57 | 16 | 25 | 68 | 63 | 27 | | | | |
| 2000TMK | 1~20 | 0.2 | | | | | | | | | | | 80 | |
| 2800TMK | 0~28 | 0.5 | 680 | 900 | 77 | 21 | 35 | 80 | 32 | | | | | |
| 4000TMK | 0~40 | 1 | | | | | | | | | | | | |
| 5500TMK | 0~55 | 1 | 1,100 | 1,200 | 19.05 | 1,100 | 77 | 21 | 100 | 91 | 40 | 32 | 765 | |
| 7000TMK | 0~70 | 1 | | | | | | | | | | | | |
| 8500TMK | 0~85 | 2 | 1,410 | 1,555 | 25.4 | 87 | 27 | 40 | 91 | 40 | 32 | 895 | | |
| 10000TMK | 0~100 | 2 | | | | | | | | | | | | |
| 14000TMK | 0~140 | 2 | 1,600 | 1,600 | | | | | | | | | | |