




08-710 (PI)



08-750 (鋁箱)



MODEL NO.	INCH/MM			
	A	B	C	D
08-710	2.5/64	12.20/312	8.50/216	1.0/25
08-730	3.6/90	17.00/432	12.00/306	2.0/50
08-750	3.6/90	17.00/432	12.25/312	1.6/40
305	2.3/60	16.60/425	12.50/305	1.0/25

自動焊錫機

免手牌

專利品



HCT-80

定量出錫
溫度控制

液晶焊錫爐

CY-230控溫錫爐




SPECIFICATIONS

MODEL NO.	230
INPUT POWER RATING	AC 110~120V, 200~240V
TEMPERATURE OF SOLDER BATH	100°C~500°C
EXTERNAL DIMENSIONS(mm)	175L x 162W x 160H
SOLDER BATH DIMENSIONS(mm)	130L x 100W x 45H
SOLDER CAPACITY	4.5kg
POWER CONSUMPTION	500W
HEATING ELEMENT	250W HEATER x 2

Model	Watt	溫度	適用錫線外徑	1 Set		6 Set	
				N.W.	G.W.	Cu.Ft	Cu.Ft
HCT-80	0-80W	0-550° C	0.6-1.6mm φ	2.6kgs	3.1kgs	0.61'	3.65'
HCT-120	0-120W	0-700° C	0.6-1.6mm φ	2.65kgs	3.3kgs	0.61'	3.65'

圓形焊錫爐

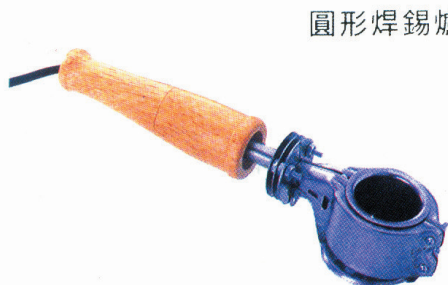

IC TANK 21 x 90 (MM)



20 x 52 (MM)




切腳機

機型	直徑	規格	錫爐		臘爐		適用電壓	說明	用途
			耗電量	溫度	耗電量	溫度			
KC40B	4cm	40x40	120W-150W	250°C-380°C	50W-60W	100°C-120°C	100V/220V	適用於一般高 溫電線電子零 件漆色線	適用於低溫熔 臘電子高級零 件
KC60B	6cm	60x40	250W-300W	320°C-420°C	60W-80W	100°C-120°C	100V/220V		
KC80B	8cm	80x40	350W-400W	350°C-420°C	70W-90W	100°C-120°C	100V/220V		
KC100B	10cm	100x40	450W-500W	350°C-420°C	80W-100W	100°C-120°C	100V/220V		

採用耐高溫銑鐵鑄造，具有耐高溫，耐蝕之特性，外型美觀輕巧，可放於操作台上溫度控制，係採用高(H)低(L)溫兩段式調整，操作簡單，使用方便，適合於小型加工廠使用

方型大錫爐系列

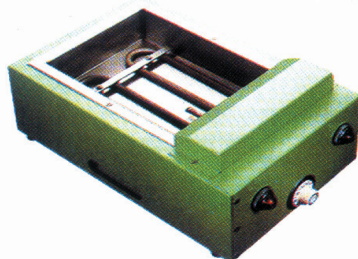

斧型烙鐵系列




控溫 1C-0°~600°C. EGO-0°~350°C

規格	WATTS	熔錫量	用途
100 x 150 x 70	600W	7	小型基板
150 x 200 x 70	800W	14	音響、中型基板
200 x 300 x 70	1000W	27	音響、中型基板
300 x 400 x 70	4000W	53	較大型基板

型號	WATTS	重量(g)	備註
SG200	200	700	
SG300	300	700	
SG500	500	700	
SG1000	1000	2700	

KA-6 切腳機



NK-200
超硬碳化鎢鋼刀

型號	品名	規格	單位	價格
KA-6	切腳機	1/2馬力	台	36000
NK-200	鎢鋼刀	200公分	片	15000
SH-810	稀釋液	1桶 16公斤	1kg	140
SH-8301	助焊液	1桶 16公斤	1kg	260