



WIRE AND CABLE STRIPPERS/CUTTERS-HAND TYPE

IDEAL Stripmaster® and IDEAL Stripmaster® Lite Wire Strippers

Optic-Lube™ Cable Pulling Lubricant



Optic-Lube™ lubricant was specially formulated for utilities, engineers and contractors who install all types of delicate fiber optic cable. Use anywhere; non-corrosive on aluminum, copper, PVC, galvanized steel, or FPE conduit.

Description	Catalog No.
1-qt. (950 ml) tub	31-920
1-qt. (950 ml) squeeze bottle	31-928
1-gal. (3.785 L) pail	31-921



For IDEAL Stripmaster® Wire Strippers and Knife-Type Blades


Specifications—Stripping Hole Diameters													Stripmaster® Catalog Number
Wire Size													
8	10	12	14	16	18	20	22	24	26	28	30		
European Flat Lamp Cord													45-089
.159	.141	.106											45-090 or 45-290**
	.144	.105	.085	.073	.073								45-091
	.144	.113	.090	.072	.061	.048	.048						45-092 or 45-292**
			.090	.072	.061	.039	.039						45-093
SP-SPT (i.e. Lamp Cord)													45-095*
				.072	.061	.048	.039	.032	.026				45-097
						.048	.039	.032	.026	.021	.016		45-098
.198	.167			.062	.055								45-099

*Also strips 2 and 3 conductor low-voltage wire used in G.E. and Touchplate remote control wiring system.

**P.O.P. Packaged.

TOLERANCES ± .001 - .005

V-Notch Stripper

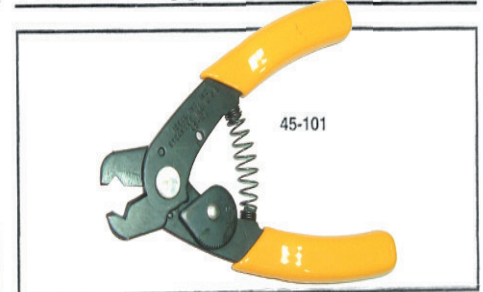

This handy tool weighs only 3 oz., and strips and cuts both solid and stranded copper and aluminum wire from 10 to 28 AWG. Features a convenient dial-type adjustment.

Description	Primary Applications	Wire Range (AWG)	Catalog Number
W/o Spring	Const./Maint., Production	10-28 Solid or Stranded	45-100
W/Spring	Const./Maint., Production	10-28 Solid or Stranded	45-101



101 PLUS Heat Gun



Specifications


101 PLUS Heat Gun Cat. No's. 46-013 & 46-014	
Dimensions	8-3/4" long, 7-3/4" high
Weight	2 lbs.
Input	120 volt, 60 Hz., 4.5 amps 250 volt, 50/60 Hz., 2.0 amps
Motor	Shaded Pole
Nozzle Length	3-7/8"
Nozzle Opening	1 dia.
Cord Length	7 ft.

Description	Catalog Number
101 PLUS Heat Gun (Comes with gold nozzle only) 120V., 60 Hz., 4.5A., UL listed	46-013
101 PLUS Heat Gun (Comes with gold nozzle only) 250V., 50/60 Hz., 2.0A	46-014

Ordering Information

Description	Wire Range	Catalog Number
Standard T®-5	10-18 AWG Solid	45-120
Standard T®-6	16-26 AWG Stranded	45-121
Standard T®-7	22-30 AWG Solid	45-125
Standard T®-8	8-16 AWG Stranded	45-124
T-cutter	10AWG	45-123

Coaxial Cable Strippers

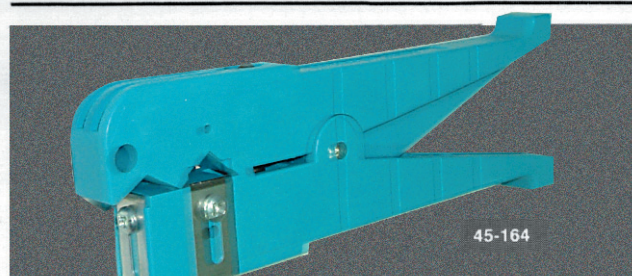

Description	Typical RG Cables	Catalog Number
Coaxial Cable Stripper, 1/8" (3.175 mm) to 7/32" (5.556 mm) O.D.	RG-58,CB Antenna Cable	45-163 (Blue)
Coaxial Cable Stripper, 1/4" (6.35mm) to 9/16" (14.287 mm) O.D.	RG-8	45-164 (Blue)
Replacement Blade Set* for 45-162, 45-163, 45-165		L-9225
Replacement Blade Set* for 45-164		L-9226