

電源線、插座

WES4-D105 Size (without wire): L*W*H=473*82*34(mm) 尺寸(不含線): 長*寬*高=473*82*34(mm)

1. 防雷擊保護器。
2. 無熔絲斷路器。
3. 合理的插孔間距。
4. 專利萬用插孔。
5. 專利安全保護門裝置。
6. 防火塑料-ABS通過UL認證

*D=Direct wiring(直接導入) *p=Bilster Paper(真空罩包裝) **WES4-D105-p**


WA-7-P

WA-7-P
wonpro

*Female Socket can accept different plugs all over the world.
*插孔部分可接受世界各國插腳。


WA-5
NO: 1A01

RATED: 10A 250V
15A 125V
COLOR: B.W
SUITABLE FOR AREA:
125V: TAIWAN, JAPAN,
U.S.A, CANADA.
250V: PHILIPPINES,
CHINA, THAILAND.
額定: 10A 250V / 15A 125V
顏色: 黑、白
適用地區:
125V: 台灣、日本、美國、加拿大
250V: 菲律賓、中國、泰國

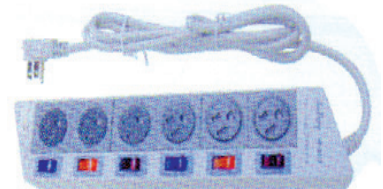


NS-3312 6開6插3孔
15A 1650W 12尺

0002 15A 125V 180° 轉向插座
防火PC材質製造可耐熱140°C
插孔 10 X 3




0004 15A 125V 轉向插座
防火PC材質製造可耐熱140°C
插孔 10 X 3




0006 15A 125V 180° 轉向插座



0014 11A 125V
2.7M(9呎/ft.) 4.5M(15呎/ft.) 6.3M(21呎/ft.)
極性插孔 10 X 3



0015 11A 125V
2.7M(9呎/ft.) 4.5M(15呎/ft.) 6.3M(21呎/ft.)
極性插孔 10 X 3

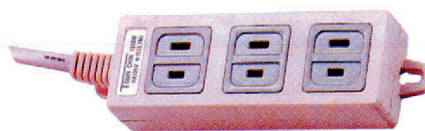

0021 15A 125V
1.8M(6呎/ft.) 2.7M(9呎/ft.) 4.5M(15呎/ft.)
集中迴路附燈過載自動斷電開關
極性插孔 10 X 6




0030 11A 125V
2.7M(9呎/ft.) 4.5M(15呎/ft.)
集中迴路附燈過載自動斷電開關
金屬烤漆外殼 / 極性插孔 10 X 10



0032 11A 125V
1.8M(6呎/ft.) 2.7M(9呎/ft.) 4.5M(15呎/ft.)
集中迴路附燈過載自動斷電開關
金屬烤漆外殼 / 極性插孔 10 X 6



0033 11A 125V
2.7M(9呎/ft.) 4.5M(15呎/ft.)
集中迴路附燈過載自動斷電開關+4獨立開關
金屬烤漆外殼 / 極性插孔 10 X 5

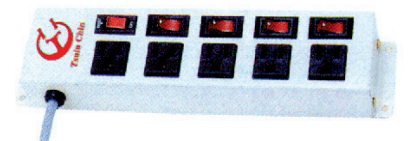

TC-024
15A 125V
三變二轉換插頭 / Plug to transform three phases into two phases
極性插孔 10 X 1

TC-700
15A 125V 0.3M(1呎/ft.) 10M(33呎/ft.) 20M(66呎/ft.) 30M(99呎/ft.) 50M(165呎/ft.)
LED 指示燈 / LED poilt lamp
附腰扣(走動、舉高不易脫落) / Waist-belt attached (prevent to fall from movement and climb)
極性插孔 10 X 3

TC-800
15A 125V 30M(100呎/ft.) 36M(120呎/ft.) 45M(150呎/ft.)
LED 指示燈 / LED poilt lamp
捲式收線功能 / Winder of wire-collection function
極性插孔 10 X 6